




Safety & Security Window Films

Performance Results:

| | |
|----------------------------------|-----|
| Visible Light Transmitted | 14% |
| Total Solar Energy Rejected | 79% |
| UV Light Rejected | 99% |
| Glare Reduction | 85% |
| Visible Light Reflected Interior | 24% |
| Visible Light Reflected Exterior | 54% |

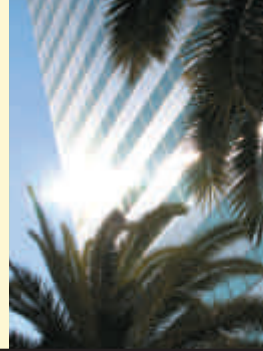

Affinity S15

A True Value for Solar and Security Protection



Affinity S15 Benefits:

- High heat rejection provides energy savings and improved comfort
- Reduces fading and helps to protect furnishings
- Lower interior and exterior reflectivity
- Reduces glare and eye discomfort
- 8 mil thick for extra security
- Increases personal safety from flying glass

| Glass Type (All 1/4") | Single Pane Clear | Single Pane Tinted | Double Pane Clear | Double Pane Tinted |
|------------------------------|-------------------------|--------------------------|-------------------------|--------------------------|
| Visible Light Transmitted | 14% | 5% | 8% | 5% |
| Total Solar Energy Rejected | 79% | 73% | 68% | 73% |
| UV Light Rejected | 99% | 99% | 99% | 99% |
| Glare Reduction | 90% | 91% | 90% | 89% |
| Visible Light Reflected Int. | 25% | 25% | 26% | 25% |
| Visible Light Reflected Ext. | 58% | 24% | 57% | 23% |
| Shading Coefficient | 0.24 | 0.31 | 0.37 | 0.31 |
| Emissivity | 0.79 | 0.79 | 0.79 | 0.79 |
| U Value | 1.00 | 1.00 | 0.47 | 0.47 |
| Solar Heat Reduction | 74% | 58% | 54% | 47% |

3M Renewable Energy Division

3M Center, Building 235-2S-27
St. Paul, MN 55144-1000